


## Nonionic Dynamic Wetting Agent and Molecular Defoamer

### SURFADOL® 541L Surfactant

Surfadol 541L surfactant has a unique Gemini structure, which brings a unique combination of performance benefits, such as surface tension reduction, foam control, and viscosity stabilization. The hydrophobic nature of Surfadol 541L surfactant typically results in significantly reduced water sensitivity compared to either conventional ethoxylated or anionic surfactants.

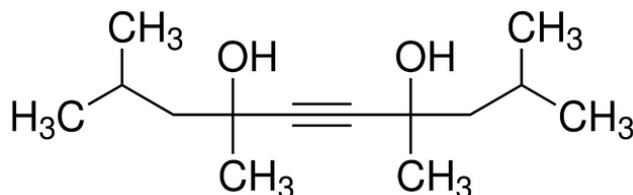

Due to its multifunctional properties, Surfadol 541L surfactant can be used in many water-based applications such as coatings, paints, adhesives, inks, pigment manufacture and dispersion, cements, metalworking lubricants, agricultural chemicals, and dye processing.

Easy-to-handle liquid preparations of Surfadol 541L are also available.

### Special properties

- Quick migration, leading to low dynamic surface tension
- Ability to wet contaminated substrates
- Non-micelle forming
- Thermal and chemical stability over a broad range of conditions
- Prevents surface defect problems such as fisheyes, crawling, and cratering on low-energy substrates
- Reduces microfoam in spray-applied systems
- Improves pigment grind efficiency
- Reduces water sensitivity
- Defoams, deairentrains, and improves flow
- Enhances leaf and soil penetration while improving bloom and stability in agricultural chemicals
- Lubricates, wets, and prevents smut formation while eliminating hot spots in metalworking fluids
- Silicone-free, APEO free, non-toxic

### Examples of application

- |                             |                          |                               |
|-----------------------------|--------------------------|-------------------------------|
| • Water-based printing inks | • Water-based adhesives  | • Dye processing              |
| • Fountain solutions        | • Waterborne coatings    | • Metalworking fluids         |
| • Overprint vanishes        | • Agricultural chemicals | • Concrete and drymix mortars |

### Processing instructions

- Mix well when use.
- Added and mixed after other surfactants.
- Pigments, fillers or other solid should be added after Surfadol 541L surfactant has been evenly mixed.

### Typical properties

Active matter	2,4,7,9-Tetramethyldec-5-yne-4,7-diol, CAS#126-86-3
Active matter content	100%
Dynamic surface tension (0.1% wt. , 6 b/s)	36 dynes/cm
Density at 25 °C, g/cm <sup>3</sup>	0.89
Solubility in water	slightly soluble
Boiling point	262 °C
Melting point	54-55 °C
Suggested use level	0.1% - 1.5% of total formulation weight

### Specifications

Test Item	Standard
Appearance	White waxy solid
APHA Color (Pt-Co)	≤350
TMDD purity (GC)	≥95.50%
Water Content	≤1.50%

### Package and storage

The standard package for this material is 180kg galvanized iron drums, 4 drums/pallet.

The product is also available in 20kg pails, 18 pails/pallet.

Keep containers tightly closed in a dry, cool, and well-ventilated place. Product is freeze-thaw stable.

Container should be heated to 60-70 °C to completely melt product; mix thoroughly before use.

The shelf life for this product is 48 months from the date of manufacture.

For more information, please send email to: [sales@acmetech.cn](mailto:sales@acmetech.cn).